


Four-Channel Data Logger Thermometer

HH309A



Standard
No Points

- ✓ 4 Type K Thermocouple Inputs
- ✓ Displays 4 Channels Simultaneously or 2 Channels with Delta
- ✓ Data Logger with 16,000 Records per Channel
- ✓ USB and RS232 Interface with Windows® Software
- ✓ Real-Time Clock
- ✓ Auto Power-Off
- ✓ HOLD Function
- ✓ MAX/MIN Function
- ✓ Resolution 0.1°C/0.1°F
- ✓ Low Battery Indication
- ✓ Built-In Tripod Mount

The HH309A is a small 4-input thermometer plus a powerful data logger. The unit can store up to 16,000 records per channel at programmed intervals. The REC button is used to start and stop recording. You can store as many data sets as you want until memory is full. The unit comes with Windows-based software (Windows 98, NT, XP, ME, Vista) for the display and saving of data.

Specifications

Range: -200 to 1370°C (-328 to 2498°F)

Typical Accuracy: ±0.2% rdg +1°C

Resolution: 0.1° between
-200 and 200°C/F, else 1°C/F

Sample Rate: 3 seconds

Operating Conditions:




Free Thermocouple Included!

This model includes a free 1 m (40") Type K insulated beaded wire thermocouple with subminiature connector and wire spool caddy (1 per channel). **Order a Spare!**
Model No. SC-TT-K-30-36.



OMEGACARESM extended warranty program is available for models shown on this page. Ask your sales representative for full details when placing an order. OMEGACARESM covers parts, labor and equivalent loaners.

Includes USB and RS232 Interface Cables

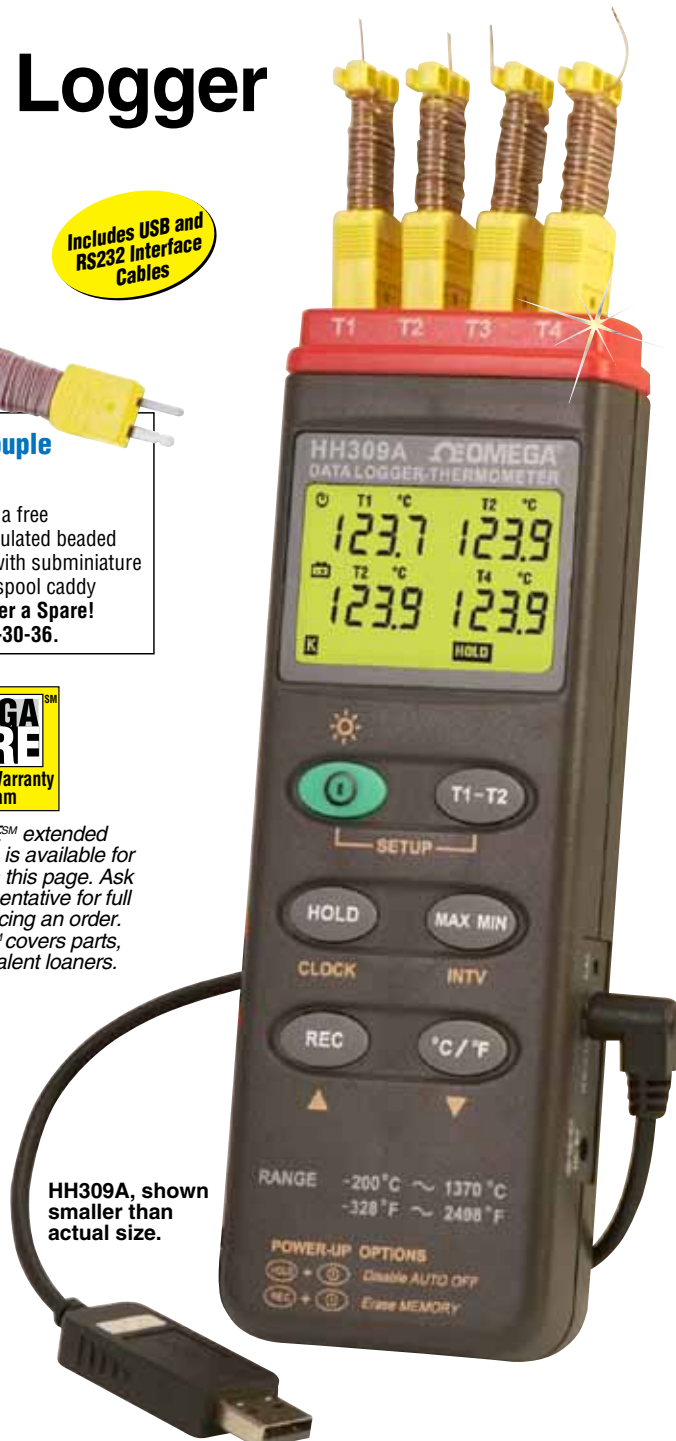

HH309A, shown smaller than actual size.

0 to 50°C (32 to 122°F)

0% to 80% RH (0 to 35°C, 32 to 95°F)

0% to 60% RH (35 to 50°C, 95 to 122°F)

Storage Temperature:

-20 to 60°C (-4 to 140°F)

Battery: 9V (included)

Dimensions:

184 H x 64 W x 30 mm D

(7.25 x 2.5 x 1.2")

Weight: Approx 250 g (8.8 oz)