

RTSX Rotary Torque Transducer

Model	Item #	Torque Ranges	
		American	S.I.
RTSX10i-H	170036	1 - 10 lbf.in	11.3 - 113 cN.m
RTSX10i	170037	1 - 10 lbf.in	11.3 - 113 cN.m
RTSX50i-H	170015	5 - 50 lbf.in	56.5 - 565 cN.m
RTSX50i	170013	5 - 50 lbf.in	56.5 - 565 cN.m
RTSX100i-H	170016	10 - 100 lbf.in	113 - 1130 cN.m
RTSX100i	170000	10 - 100 lbf.in	113 - 1130 cN.m
RTSX200i-H	170017	20 - 200 lbf.in	226 - 2260 cN.m
RTSX200i	170002	20 - 200 lbf.in	226 - 2260 cN.m
RTSX50F	170004	5 - 50 lbf.ft	6.8 - 67.8 N.m
RTSX100F	170006	10 - 100 lbf.ft	13.6 - 135.6 N.m
RTSX400F	170008	40 - 400 lbf.ft	54 - 542.4 N.m
RTSX738F	170010	74 - 738 lbf.ft	100 - 1000 N.m
RTSX1500F	170040	150 - 1500 lbf.ft	203.3 - 2033 N.m

DRIVE SIZE

Model	Input	Output
RTSX10i-H	1/4 Male/Hex	1/4 Female/Hex
RTSX10i	1/4 Female/Square	1/4 Male/Square
RTSX50i-H	1/4 Male/Hex	1/4 Female/Hex
RTSX50i	1/4 Female/Square	1/4 Male/Square
RTSX100i-H	1/4 Male/Hex	1/4 Female/Hex
RTSX100i	1/4 Female/Square	1/4 Male/Square
RTSX200i-H	1/4 Male/Hex	1/4 Female/Hex
RTSX200i	3/8 Female/Square	3/8 Male/Square
RTSX50F	3/8 Female/Square	3/8 Male/Square
RTSX100F	1/2 Female/Square	1/2 Male/Square
RTSX400F	3/4 Female/Square	3/4 Male/Square
RTSX738F	1 Female/Square	1 Male/Square
RTSX1500F	1 1/2 Female/Square	1 1/2 Male Square

SPECIFICATIONS

Output at Rated Capacity: ≤ 6 Nm [53 lbf.in] rated torque 1 mV/V
 > 6 Nm [53 lbf.in] rated torque 2 mV/V

Interchangeability: Matched for mv/v and
 shunt calibration $\pm 0.3\%$ FS

Nonlinearity: $\pm 0.2\%$ FS

Excitation Recommended: 10V DC or AC RMS

Bridge Resistance: 350 Ohms

Usable Temperature Range: 41 - 122°F

Mating Connector: Bendix PT06A-10-65 (SR)

Safe Overload: 125% of Rated Output

DIMENSIONS

Model	A	B	C	D	E
RTSX10i-H	101	28	52	58	28
RTSX10i	75	28	52	58	8.5
RTSX50i-H	101	28	52	58	28
RTSX50i	75	28	52	58	8.5
RTSX100i-H	101	28	52	58	28
RTSX100i	75	28	52	58	8.5
RTSX200i-H	101	28	52	58	28
RTSX200i	74.5	38	58	44	18
RTSX50F	74.5	38	58	44	18
RTSX100F	79	38	58	44	22.5
RTSX400F	97	58	76	50	30
RTSX738F	112	73	90	57	34.5
RTSX1500F	165	110	126	87	44



TRANSDUCCERS

KEY FEATURES

Accuracy $\pm .25\%$ of full scale.

Use with most hand tools, power tools, or rotational measurement applications.

Connects between the power tool and the joint. Monitors actual torque being applied from the driver to the fastener.

Features "ARC" technology, an instant auto-recognition system of the RTSX connected to the TorqueMate® Plus.

Bi-directional.

CONNECT WITH A:



ANALYZER

Wizard Plus (shown)

SEE PAGE 01.5

TorqueLab®

SEE PAGE 01.3

TorqueMate® Plus

SEE PAGE 01.6

RTSX CABLE

Item #065138

For connecting to
 TorqueLab® or
 TorqueMate® Plus

Item #065181

For connecting to
 Wizard Plus

CONNECTION

A = Excitation (+)



B = Excitation (-)

C = Output (-)

D = Output (+)

E = Shield

F = 100% control
 (full scale)

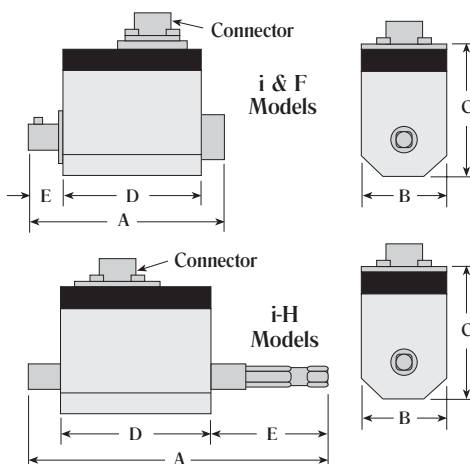

BL-SERIES DRIVER

Electric Torque
 Screwdriver Brushless

SEE PAGE 03.12

Office: Jl. Radin Inten II No. 62 Duren Sawit, Jakarta 13440 - Indonesia
 Workshop: Jl. Pahlawan Revolusi No. 22B, Jakarta 13430 - Indonesia

Phone: 021-8690 6777 (Hunting)

Mobile: +62 816 1740 8925

Fax: 021-8690 6771

